

V16, V14, T14V, T12V


V/T SERIES	V16	V14	T14V	T12V
DIMENSIONS				
LENGTH	5.1m	4.4m	4.3m	3.7m
MAX. BEAM	1.78m	1.73m	1.54m	1.52m
BOW HEIGHT	.76m	.76m	.65m	.64m
TRANSOM–Width	1.58m	1.58m	1.52m	1.52m
TRANSOM–Height	.51m	.51m,.38m	.38m	.38m
FULL VEE HULL				
THICKNESS bottom	1.65mm	1.65mm	1.52mm	1.52mm
THICKNESS sides	1.65mm	1.65mm	1.27mm	1.27mm
CAPACITIES				
HORSEPOWER– Maximum	25 HP 18kw	20 HP 15kw	15 HP 11kw	10 HP 7kw
PERSONS–20"tran: LOAD-lbs.–20"tran:	5	5	4	3
CAP. GEWICHT – KG	626	542	374	297
GEWICHT – KG	127	104	82	73
SEATING				
BENCH/bow	3/1	3/1	3/0	3/0
OPTIONAL SEATS–clamp-on seats w/swivel				

CONSTRUCTION FEATURES

- AQUEDUCT TRAY–V16, 20" transom V14

PAINT COLOR

- Oxford White paint w/Dove Gray interior
- Optional Khaki paint

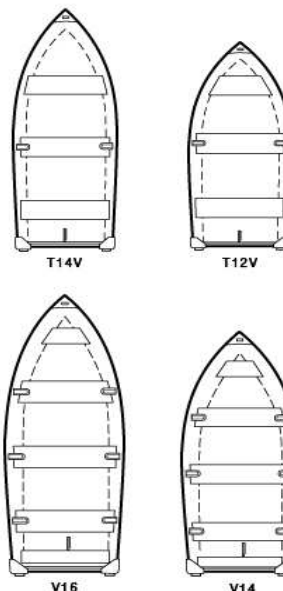

Alumacraft Nederland
 Industrieweg 6
 1613 KV Grootebroek
 0228-512722 / 06-14678471
www.alumacraftnederland.nl